


HR-WRAP Dual Mesh Network

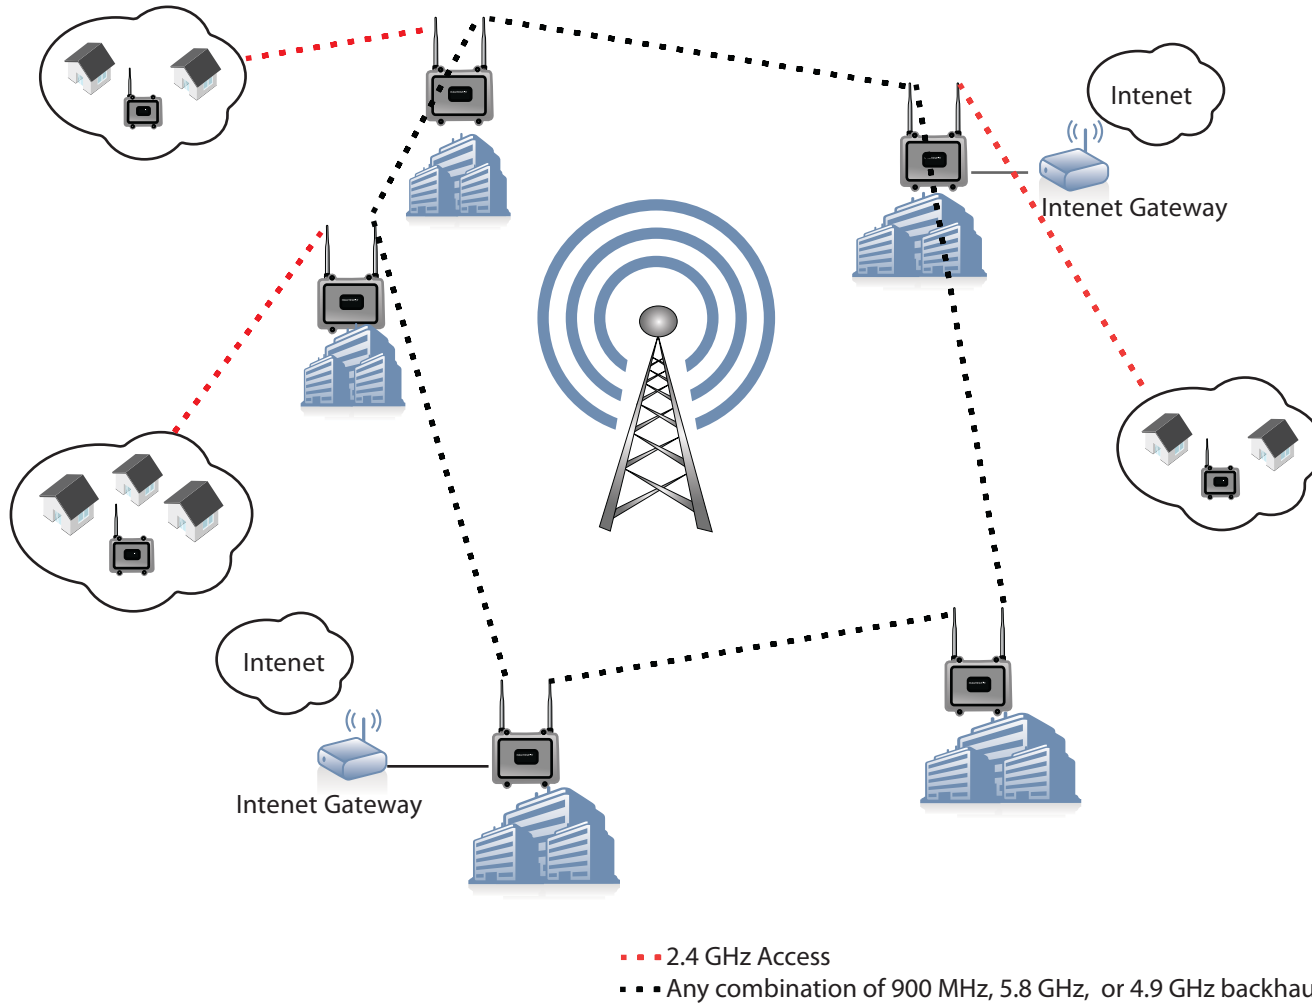

HR-WRAP Product Family

- 802.11 Contention protocol
- Access Control (MAC table)
- MAC Firewall
- Client statistics
- 40 and 128 bit WEP and WPA support
- Authentication via remote RADIUS server using captive portal
- IP filtering
- Routing for RIP, BGP, OSPF, OLSR mesh
- DNS relay
- DHCP server or relay
- SNMP/SSH/Telnet/Java Client
- WDS for transparent bridging
- Quality of Service Management
- Multicast Routing

HR-WRAPDX Advantage

- Low failure rate
- Fixed or mobile client
- Supports policy-based routing and sophisticated data rate management
- Range (2 - 20 miles)
- Low cost
- Single Radio or dual radio option
- Max throughput 27 Mbps aggregate
- Up to 2 wireless interfaces

Radio Options:

- HR-WRAPDX-9x – 900MHz Mesh AP bridge
- HR-WRAPDX-2x – 2.4 GHz Mesh AP bridge
- HR-WRAPDX-4x – 4.9 GHz Mesh AP bridge
- HR-WRAPDX-5x – 5.8 GHz Mesh AP bridge

HR-WRAPDX



HR-WRAPDX



HauteSpot Networks Corporations

Date: 10/31/2007

Revision 1.0